TOYO-G








ONE STOP LUBRICANTS SOLUTION PROVIDER

Scan QR code to read more TOYO-G Product info.

linktr.ee/toyog





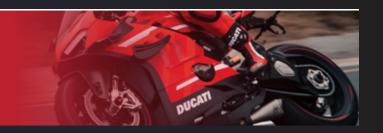

TOYO-G TOP RANGE (with super speed performance additives) is a super high performance and high speed racing engine oil that formulated from high quality synthetic base lubricant and special additives to ensure optimum lubricating performance.

TOYO-G TOP RANGE series are specially designed to preserve better & smoother power output so as to provide maximum performance in motorsport. It has been fortified with premium anti-wear additive to give better protection especially to the flat tappet cams and push rods etc. Heavy load appears when high RPM engines running in the field and hence TOYO-G has specially designed a high performance friction modifier when develop TOYO-G TOP RANGE series.

Most suitable for racing motorbikes with super high speed engines.

Encompasses Toyo-G's 'no compromise' philosophy. Adopted with our most sophisticated production supervision, advanced blending tech, stringent quality control and elite chemistry selection. Crafted by the best to serve for the best, good luck and enjoy.



TOYO-G TOP RANGE 5W-60 ₹

- · Better protection during high revs · Maximum power output
- Smoother gear shifting and strengthen engine performance
- Thermally stable detergent system for enhanced engine
- cleanliness and better catalyst durability
- · Better clutch friction durability
- · Additive with booster components which provide better protection for engine, clutch and gear lubrication
- With JASO MA2 technology, it provides a satisfactory clutch performance
- Built-in corrosion resistance

PACKAGING


Bottle 1L (12 pcs/Box) 8696L-0734 Bottle 4L (4 pcs/Box) 86961-080 Pail 18L 8696L-1021

Drum 209L 8696L-0379

100% SYNTHETIC ESTER+PAO SPECIFICATIONS & PERFORMANCE:

APISN

I JASO MA, MA2



- · Maximum power output
- Smoother engine performance
- Thermally stable detergent system for enhanced engine cleanliness and better catalyst durability
- · Better clutch friction durability
- · Able to provide better protection for engine, clutch and gear **l**ubrication
- With JASO MA2 technology, it provides a satisfactory clutch performance
- · Built-in corrosion resistance

Pail 18L

Drum 209L

Bottle 1L (12 pcs/Box)

Bottle 4L (4 pcs/Box)

8696L-0735 8696L-0966 8696L-1116 8696L-1020

100% SYNTHETIC ESTER+PAO

SPECIFICATIONS & PERFORMANCE:

JASO MA, MA2





EXTRA SPEED

4 STROKE OIL

TOYO-G EXTRA SPEED 10W-40



• Thermally stable detergent system for enhanced engine cleanliness and better catalyst durability

- · Smoother engine performance
- Better clutch friction durability
- Selected additives which provide better protection for engine, clutch and gear lubrication
- With JASO MA2 technology, it provides a satisfactory clutch performance
- · Built-in corrosion resistance

PACKAGING CAPACITY

Bottle 1L (12 pcs/Box) 8696L-0733 Bottle 4L (4 pcs/Box) 8696L-1341 Pail 18L 8696L-1162 Drum 209L 8696L-1342

NUMBER

100% SYNTHETIC with ESTER

SPECIFICATIONS & PERFORMANCE:

I API SN

JASO MA, MA2



4 STROKE

TOYO-G EXTRA SPEED 5W-40



 Thermally stable detergent system for enhanced engine cleanliness and better catalyst durability

- · Smoother engine performance
- Better clutch friction durability
- Selected additives which provide better protection for engine, clutch and gear lubrication
- With JASO MA2 technology, it provides a satisfactory clutch performance
- · Built-in corrosion resistance

PACKAGING

PAR⁻ NUMBEI

 Bottle 1L (12 pcs/Box)
 8696L-0962

 Bottle 4L (4 pcs/Box)
 8696L-0964

 Pail 18L
 8696L-0963

 Drum 209L
 8696L-0965

100% SYNTHETIC with ESTER

SPECIFICATIONS & PERFORMANCE:

API SN

JASO MA, MA2

STROKE TOYO-G V-TWIN 60



TOYO-G VTWIN is a premium synthetic blend with ester specifically made for V-Twin Engines, Chaincasesand Transmission applications. With premium technology, it is well suited for cold start during winter and is resistant to high heat during engine idling especially in the heavy traffic.

With genuine grade additives, TOYO-G VTWIN is able to ensure your V-Twin engine is continuously protected in the most extreme riding conditions, particularly suitable for high-way riders performing long journey.

PACKAGING	PART
CAPACITY	NUMBER

Bottle 1L (12 pcs/Box) 8696L-0261 Bottle 4L (4 pcs/Box) 8696L-1336 Pail 18L 8696L-1337 Drum 209L 8696L-1338

SYNTHETIC PLUS ESTER

SPECIFICATIONS & PERFORMANCE:

API GL-1

MEET MOTOR OIL SAE 60

MEET GEAR OIL SAE 140 EP

4 STROKE TOYO-C

TOYO-G V-TWIN 20W-50

20W-50

- Thermally stable detergent system for enhanced engine cleanliness and better catalyst durability
- Smoother engine performance
- Able to provide better protection for engin lubrication
- Built-in corrosion resistance
- · Reduce operating temperature
- Maximum protection against wear

PACKAGING PART CAPACITY NUMBER

 Bottle 1L (12 pcs/Box)
 8696L-0260

 Bottle 4L (4 pcs/Box)
 8696L-1333

 Pail 18L
 8696L-1334

 Drum 209L
 8696L-1335

SYNTHETIC PLUS ESTER

SPECIFICATIONS & PERFORMANCE:

API GL-1

MEET MOTOR OIL SAW 20W-50

MEET GEAR OIL SAE 90 EP

V-TVIN







TOYO-G SCOOTER 10W-40 FS PACKAGING CAPACITY Bottle 1L (12 pcs/Box) 8696L-1073 • Better Controlling and Smoothest Acceleration Performance • Together with advance additives, it helps to reduce unnecessary Bottle 4L (4 pcs/Box) 8696L-0364 noise and vibration Pail 18L 8696L-0381 • High Shear stability which offers resistance to viscosity and Drum 209L 8696L-0902 thermal breakdown during at high temperatures usage · Good detergent packages that helps to clean internal parts, FULLY SYNTHETIC with ESTER remove sludge and deposits formation · Contains Anti-wear additives to protect against scuffing and wear SPECIFICATIONS & PERFORMANCE: API SN IJASO MB

4 STROKE ENGINE OIL	TOYO-G SCOOTER 5W-40 MB	PACKAGING CAPACITY	PART NUMBER
6	TOYO-G SCOOTER 5W-40 MB is a high grade, multilevel synthetic engine oil (with ester) specially developed for all scooter types that are running in automatic transmission (without clutches) and four stroke systems that are trending in low emissions. It contains with JASO MB performance to ensure engine is being well protected for	Bottle 1L (12 pcs/Box) Bottle 4L (4 pcs/Box) Pail 18L Drum 209L	8696L-0869 8696L-0152 8696L-0153 8696L-0154
5W-40	daily commuting and urban ridding. It provides excellent protection against oxidation and corrosion issues. In general, scooters will have higher RPMs than other motorcycles, together	SYNTHETIC with ESTER	
	with TOYO-G selected additives, it gives smoother acceleration in an automatic transmission.	SPECIFICATIONS & PERFO I API SM I JASO MB	DRMANCE:

GEAR OIL	TOYO-G SCOOTER GEAR 80W-90	PACKAGING CAPACITY	PART NUMBER
 Excellent for gear and bearing protection Prevent gear from pitting and wear resistances Provides excellent protection against rust and corrosion Good oxidation and prolong oil service life Good shear and thermal stability 	Bottle 100ML (40 pcs/Box)	8696L-1159	
16	Smoother acceleration among others conventional lube	SYNTHETIC	
		SPECIFICATIONS & PERFORI	MANCE:
AE BOWLS		API GL-5	
O Enter		I-	





PRO-TECH



4 STROKE ENGINE OIL
ENGINE OIL

TOYO-G PRO-TECH 10W-40



• Thermally stable detergent system for enhanced engine cleanliness and better catalyst durability

- Good in start stop usage and provides smoother engine
- · Better clutch friction durability, ideal for bikes in normal daily use · Able to provide better protection for engine, clutch and gear
- With JASO MA2 technology, it provides a satisfactory clutch performance
- · Built-in corrosion resistance

ACC.	MARIA

PART NUMBER

8696L-1074

86961-1206

8696L-1216

8696L-0903

NUMBER

SYNTHETIC with ESTER

Bottle 1L (12 pcs/Box)

Bottle 4L (4 pcs/Box)

SPECIFICATIONS & PERFORMANCE:

I API SM JASO MA2

Pail 18L

Drum 209L

PACKAGING

CAPACITY

Jubrication

STROKE

TOYO-G PRO-TECH 15W-50



- Thermally stable detergent system for enhanced engine cleanliness and better catalyst durability
- · Smoother engine performance
- · Better clutch friction durability
- Able to provide better protection for engine, clutch and gear
- · With JASO MA2 technology, it provides a satisfactory clutch performance
- · Built-in corrosion resistance

PACKAGING CAPACITY

Bottle 1L (12 pcs/Box) 8696L-0731 Bottle 4L (4 pcs/Box) 8696L-1339 Pail 18L 8696L-1115 Drum 209L 8696L1340

SYNTHETIC with ESTER

SPECIFICATIONS & PERFORMANCE:

I API SM

JASO MA, MA2

STROKE 'ENGINE OIL

TOYO-G PRO-TECH 20W-50



- Thermally stable detergent system for enhanced engine cleanliness and better catalyst durability
- · Smoother engine performance
- · Better clutch friction durability
- · Able to provide better protection for engine, clutch and gear **l**ubrication
- · With JASO MA2 technology, it provides a satisfactory clutch performance
- · Built-in corrosion resistance

PACKAGING CAPACITY

PART NUMBER

Bottle 1L (12 pcs/Box) 8696L-0730 Bottle 4L (4 pcs/Box) 8696L-0233 Pail 18L 8696L-0234 Drum 209L 8696L-0235

SYNTHETIC with ESTER

SPECIFICATIONS & PERFORMANCE:

I API SM

JASO MA, MA2

2 STROKE OIL

TOYO-G TOP RANGE 2T ₹



- · Designed to Protect Against High Friction and High Shear.
- · Protection against thermal and machine breakdown.
- · Assist engine cleanliness and virtually smokeless exhaust.
- · Minimizing spark plug fouling to ensure reliable starting.
- · Environment friendly.

KAGING	PAR [*]
ACITY	NUMBEI

Bottle 1L (12 pcs/Box) 8696L-0017 Pail 18L 8696L-0236 Drum 209L 8696L-1117

FULLY SYNTHETIC ESTER+PAO

RATIO 50:1

PAC

SPECIFICATIONS & PERFORMANCE:

I API TC IISO-L-EGC/EGD

JASO FC/FD



2 STROKE OIL





- Preserve Power Output and Enhance Fuel Consumption Efficiency and Economy.
- Excellent Start-up Protection and Rapid Circulation.
- Designed to Protect Against High Friction and High Shear.
- Protection against thermal and machine breakdown.
- · Assist engine cleanliness and virtually smokeless exhaust.
- · Minimizing spark plug fouling to ensure that reliable starting.
- · Carbonless which can be the sign of environment friendly.

ttle 1L (12 pcs/Box)	8696L-0197

Pail 18L 8696L-0705 Drum 209L 8696L-0203

SYNTHETIC BLEND

RATIO 50:1

PACKAGING

CAPACITY

SPECIFICATIONS & PERFORMANCE:

ISO-L-EGD I API TC

JASO FD





PART NUMBER



SUSPENSION FLUID	TOYO-G FORK 10	PACKAGING CAPACITY	PAR ⁻ NUMBER
9	 Ready damping performance Better seal protection Minimize metal friction to protect against wear Protect against corrosion of suspension components Minimal increases in air entrainment 	Bottle 1L (12 pcs/Box)	8696L - 083
10	Excellent hydrolytic stability which helps against water and moisture contamination	PART SYNTHETIC	
6/80	Outstanding thermal and oxidative stability	SPECIFICATIONS & PERFO	RMANCE:
		All kind of motorcycles	suspension
		Light to medium weigh	nt

ANTIFREEZE COOLANT	TOYO-G COOLANT ACE	PACKAGING CAPACITY	PART NUMBER
1	 Protect against freezing and boiling Long-life protection against corrosion forming Seal and hose compatibility Clean Operation Non-flammable 	Bottle 1L (12 pcs/Box) Bottle 4L (4 pcs/Box) Pail 18L Drum 209L	8696L-0675 8696L-1026 8696L-0676 8696L-0677
COOLANT	 Longer life drain interval Nitrite, Phosphate, Borate, Silicate, and Amine free 	EXTENDED-LIFE CONCE	
Maria P		Recommended mixing ra	
		perform better result	

ANTIFREEZE COOLANT	TOYO-G COOLANT KING	PACKAGING CAPACITY	PART NUMBER
100	Reduced Coolant Misting Protection against corrosion forming Environmentally Friendly Clean Operation Anti-rust protection	Bottle 1L (12 pcs/Box) Bottle 4L (4 pcs/Box) Pail 18L Drum 209L	8696L-0408 8696L-0397 8696L-0225 8696L-0396
COOLANT		100% CONCENTRATED I	
		Min. 30% - Max. 50% o	f water can





SPECIALTY GREASE

TOYO-G SHS Bearing GREASE

PACKAGING PART NUMBER CAPACITY

Tub 120GM (12 pcs/Box) 8696G-0650



This is a super high speed bearing grease with excellent oxidation stability and lubrication properties. Combining with Nano technology and low base oil viscosity it is especially for most high speed applications. It's tenacious structural stability reduces consumption service life. It consists of ester base oil and lithium complex soap, the molecular structure of the product helps minimize wear and boasts greater penetration and finer grease film. **Product Application**

TOYO-G SHS WHEEL BEARING GREASE is recommended for applications in public transport, high speed motor bearings, high speed rolling bearing in spindles, textile spindles, exhaust fan bearings, electric motors and high and low speed small bearings. TOP RANGE SHS R+ is also has low pour point and excellent low temperature torque. A ready use product for all kind of motorsport competitions.

SYNTHETIC

Continuous lubrication temperatures:

-45.6 °C / -22 °F to 182 °C / 350 °F

NI GI Grade:

Color: Blue Sparkling

AEROSOL LUBRICANT

TOYO-G BUFF & SHINE ₹

PACKAGING

PART NUMBER

Extra Silicone fluid specially make for bike enthusiast, a can which can easily make your bike more attractive. Buff & shine all day, regardless of the weather.

Product Application

Rubber, plastic and leather. Always test on an inconspicuous area

Direction for use

Shake well before use. Spray on, polish with dry cloth to achieve high gloss effect. Strongly advise to wash and clean your bike prior to apply this product. Make sure the surface is in dry condition before apply this product.

Bottle 600ML (12 pcs/Box) 8696S-0014

APPEARANCE: LIQUID PROPELLANT: HYDROCARBON PRODUCT APPLICATION:

Ideal for use to reduced cracking or splitting of Rubber seal, rubber belt, plastic component, leather treatment, cables, pulleys, guide rails,

sliding doors and more.



BRAKE CALIPER

TOYO-G CHAIN GREASE ₹

PACKAGING CAPACITY

Long last chain grease specially developed to offer best protection for motorcycle chain. High pressure resistance to reduce continuous friction between metal-to-metal surface.

Product Application

Specially developed for all types of motorbike chain including "O" and "X" ring types.

Direction for use

Shake well before use. Spray on, allow to penetrate, simple rotation of the chain as require when apply. Strongly advise that the chain is clean with TOYO-G POWERFUL PARTS CLEANER prior to apply.

Bottle 600ML (12 pcs/Box) 8696S-0013

Operating Temp.: -36°C to 224°C Color: Golden Brown

NLGI Grade:

⊕ Non-Fling Type

Excellent Water Resistant

SPECIALTY

TOYO-G DRY CHAIN PASTE

This is a super high speed chain paste with excellent rust

prevention and lubrication properties which proven that unstoppable performance output during competition. It presents outstanding white colour paste and adhesiveness texture especially for most high speed chain applications. Added with extreme pressure additives, it reduces friction and able to increase

PACKAGING

Tube 120GM (12 pcs/Box) 8696G-0651



chain durability. **Product Application**

TOYO-G DRY CHAIN PASTE is recommended for all type of chains (Standard, O-Ring, X-Ring and Z-Ring). It is suitable for use in all type of motorbikes and go-karts.

A ready use product for all kind of motorsport competitions.

SYNTHETIC

Continuous lubrication temperatures:

-40 °C / -40 °F to 300 °C / 572 °F

NLGI Grade: Color:

White





GEAR OIL **TOYO-G GO** 75W-90 FS **₹**

PACKAGING PART NUMBER CAPACITY

TOYO-G (LSD R+) Limited Slip Differential Racing Plus Gear and

Axle Oil. A super high performance, multipurpose, thermally stable gear lubricant which are formulated from the combination of dual high quality pure synthetic and ester base stocks. With advanced additives package to meet the latest specifications for today's high performance and high speed automobiles applications. It provides excellent protection against rust and corrosion, wear resistance, oxidation, good thermal stability and able to offer excellent lubrication under extreme conditions.

These special technology additive package suspends sludge and deposits in the gear oil, reduces foaming, extend gear equipment life and prolonged oil service life.

Bottle 1L (12 pcs/Box) 8696L-0712

Product Specifications & Performance (Suitable for use)

API GL-5 | ZF TE-ML 04G | ZF TE-ML 07A |



AEROSOL CLEANER

TOYO-G POWERFULL PARTS

CLEANER

Ideal for use to dissolves and removes oil, grease, tar, brake fluid, dirt without leaving residue. Does not attack rubber, plastic or

- Fast drying Brake & Parts cleaner that leave no residues
- Safe to use on all plastics, rubber, and metal

like aluminium, metals, plastic and rubber

Fast acting cleaning solution

equipment and rims etc.

· Easy to rinse and leaves no residue

• Ease of application, just spray on the contact surface without wiping requirement

It is a powerful degreaser that quickly remove grease, oil and dirt.

Good penetrating ability, easy to rinse and leaves no residue. This water soluble powerful degreaser is safe to use on most surfaces

• Easy to removes grease, oil, dirt, sludges and grimy residues • It is safe to use on most surfaces like aluminium, metals, plastics and is ideally for use on tools, engines, forklifts, chains, power

PACKAGING CAPACITY

PART NUMBER

Bottle 600ML (12 pcs/Box) 8696S-0686

APPEARANCE: CLEAR LIQUID PROPELLANT: C02 PRODUCT APPLICATION:

Brake, automotive parts, industrial parts & tools.

AEROSOL CLEANER **TOYO-G DEGREASER** PACKAGING CAPACITY

PART


Bottle 300ML (12 pcs/Box) 8696S-1124

APPEARANCE: LIOUID PROPELLANT: HYDROCARBON PRODUCT APPLICATION:

Power tools, works surface, industrial machinery, automotive parts & tools.

TOYO-G GO 75W-140 FS **₹**.

PART NUMBER



- · Superior shear stability which offer better performance during racing period
- LSD technology improving racing differentials efficiency
- · Together with friction modifier additive which helps to reduce friction during operation
- Fortified with extreme pressure additive to provide excellent load carrying ability and extreme pressure properties.

Bottle 1L (12 pcs/Box)

PACKAGING

CAPACITY

8696L-0706

Product Specifications & Performance (Suitable for use)

APIGL-5 | ZFTE-ML 04G | ZFTE-ML 07A | ZF TE-ML 08

AEROSOL LUBRICANT

Extremely high-pressure resistant and incredibly adhesive chain lube. Excellent waterproof performance and thermal stability. Suitable for use for all season.

- · Excellent Penetrating Effect
- Excellent Rust and Corrosion Protection

TOYO-G CHAIN LUBE

- · Good Adhesiveness and High Film Strength to Prevent Fling-Off
- · Resistance to Shocks, impacts and Water Washout
- · Reduces Wear, Friction and Heat
- Excellent Protection for Longer Lasting Chain Life.

Bottle 300ML (12 pcs/Box) 8696S-1166

APPEARANCE: LIQUID PROPELLANT: HYDROCARBON PRODUCT APPLICATION:

PACKAGING

Specially designed for motorbike chains of motorbikes used on the road and particularly in races as well. It can also be used on heavy industrial machinery chain.



GEAR OIL



AEROSOL LUBRICANT

TOYO-G SILICONE LUBRICANT

PACKAGING CAPACITY

PART NUMBER

Lubricates, cleans, prolonged and protects all metal and non-metal material including plastic, rubber, and vinyl. It dries fast and leaves a clear coat on the surface.

· Safe to use on most Plastics, Rubber & leather

· Long term Jubrication

· Excellent water resistant

• Translucent, Non Staining and won't attract dirt

· Suitable for applications subjected to a wide range of temperatures.

Bottle 300ML (12 pcs/Box) 8696S-1165

APPEARANCE: LIQUID PROPELLANT: HYDROCARBON PRODUCT APPLICATION:

Ideal for use to reduced cracking or splitting of Rubber seal, rubber belt, plastic component, leather treatment, cables, pulleys, guide rails, sliding doors and more.

BRAKE & CLUTCH FLUID

TOYO-G DOT 4

PACKAGING CAPACITY

PART NUMBER

• Special formulation designed specifically for the ABS Braking

Bottle 1L (12 pcs/Box)

Bottle 500ML (12 pcs/Box) 8696L-0256 8696L-0945

· Having great thermal stability

Systems and most Hydraulic Clutch.

· Longer lifespan with 100% Fully synthetic formulation.

• It prevent sheer and undiluted water in the braking system. · Features excellent corrosion protection for ferrous and non-ferrous metals.


FULLY SYNTHETIC

MEET STANDARD: F.M.V.S.S No. 116.

TYPICAL BOILLING POINT: DRY 250°C

I WET 170°C

SPECIFICATION: SAE J 1703

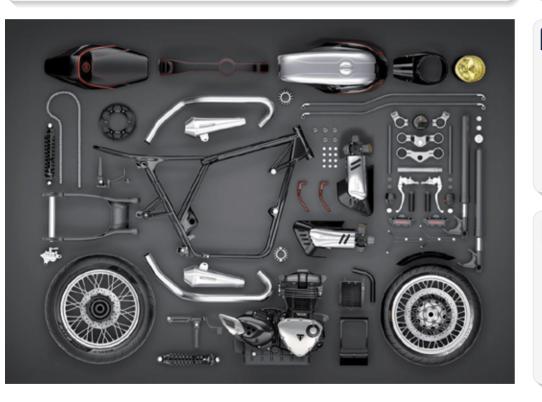

BRAKE CALIPER TOYO-G EAJ 168 BCG GREASE

PACKAGING CAPACITY

NUMBER

NUMBER

EAJ 168 BCG is a non-toxic and non-melting, pure synthetic brake caliper grease. It is compatible with most brake rubber and plastic parts, extend the life of your brake pads and calipers as well as prevent unwanted noise and vibration.

· Plastic and rubber safe

· Resist moisture and water wash out

· Protection against corrosion

· Prevents sticking and uneven wear and reduces the chance of brake chatter

Tube 60GM (24 pcs/Box) 8696G-1289

Operating Temp.: -36°C to 224°C Translucent Blue

NI GI Grade:

INDUSTRIAL HAND CLEANER

TOYO-G DIRT-OFF

TOYO-G DIRT-OFF industrial hand cleaner is a fast-acting easy rinse hand gel specially blend for industrial hand cleaning purpose, infused with natural micro mineral to scrub off tough dirt, grease, oil, ink, paint, glue, tile cements, gasket, epoxies, soils & grime etc. It is a petroleum solvent free thick hand gel contains no harsh chemicals that can sting cuts or abrasions and is fortified with plant based softening agent, coconut derived grease cutter, biodegradable surfactant, vegetable derived skin conditioners and natural citrus fragrance to deep clean and protect raw, rough hands.

DIRECTIONS FOR USE

Rub hand cleaner into dry hands until dirt or grease is dissolved, rinse with water.

PACKAGING CAPACITY

Bottle 1KG (12 pcs/Box) 8696C-0181 Bottle 4KG (4 pcs/Box) 8696C-0174

Product Type: Hand cleaner Color: white

Odour:

⊕ Non-Flammable

⊕ Non Solvent Type



