

# EAJ 168BCG Brake Caliper Grease



PROFESSIONAL MAINTENANCE KIT

[www.toyointernational.com](http://www.toyointernational.com)



60g  
24pcs/ box

PART NO :8696G-1289

#### Safety Data Sheet

Safety data sheet can be requested via website [www.toyointernational.com](http://www.toyointernational.com) or you may also can get them from your local agent/ supplier.  
SDS Number: GP10-02

#### Storage and Handling

This product shall be ideally stored in a cool, dry location in unopened containers. Keep away from children.

#### Shelf Life

With good practicing on storage, the minimum shelf life from the batch number approx. 3 years or 36 months  
Condition of the product must in the unopened original container

#### Disclaimer:


This information is our best knowledge, true & accurate, subjected to change without prior notice due to continual product research and development. All recommendations or suggestions are without guarantee since the conditions of use are beyond our control. The manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty of immunity against patent infringement.

#### PRODUCT DESCRIPTION

EAJ 168 BCG is a non-toxic and non-melting, pure synthetic brake caliper grease. It is compatible with most brake rubber and plastic parts, extend the life of your brake pads and calipers as well as prevent unwanted noise and vibration.

#### FEATURES AND BENEFITS

- Plastic and rubber safe
- Resist moisture and water wash out
- Protection against corrosion
- Prevents sticking and uneven wear and reduces the chance of brake chatter

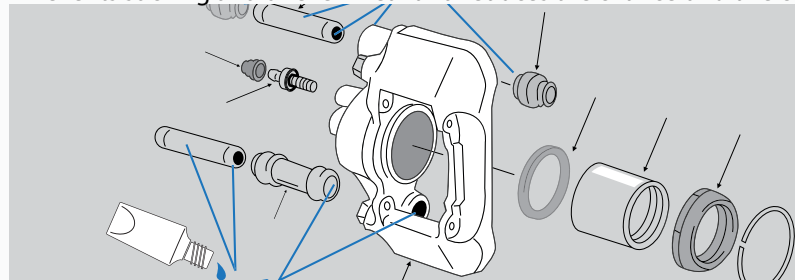

#### PRODUCT APPLICATION

- Can be applied on caliper pins, sleeves, bushings, bolts and caliper pistons to keep them lubricated and long life protection

#### DIRECTION FOR USE

1. Before application, clean mating surface with Toyo Grease® Brake & Parts Cleaner spray.
2. Ensure the surface is clean and dry before application.
3. Apply EAJ168BCG to the parts that require protection.
4. Reassemble parts and wipe off excess material.

#### PHYSICAL & CHEMICAL PROPERTIES

NLGI Grade	0
Worked Penetration @ 25°C / 77°F, ASTM D-217	355 - 385
Appearance	Smooth
Colour	Translucent blue
Dropping point, ASTM D-2265	Non-Melt
Operating temperature	-36°C to 224°C / -33°F to 435°F

# TOYO GREASE

Issued: 05 OCT 2020  
TOYO GREASE MANUFACTURING | The Grease & Lubricant Manufacturer  
A Member Of NLGI, USA | National Lubricating Grease Institute